
Data Sheet Optional booklet corner rounder and spine squarer ARSD-100

The ARSD-100 module maybe be connected in-line to the Smart-binder delivery conveyor in order to either square the booklet spine and/or round the corners of the booklet

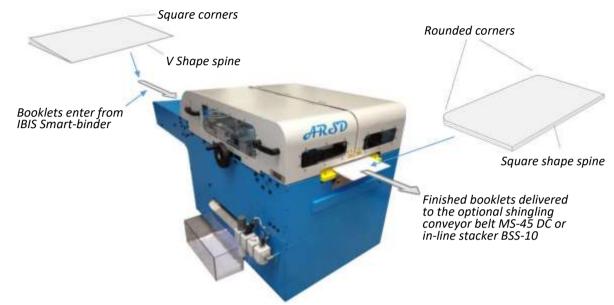

Video: ARSD-100 in operation

A cutting die is used to round the corners and high-pressure clamps are used to square the spine. Touch screen controls allow the operator to select either one cut or two rounding cuts, or to select only spine-squaring, or only corner-rounding. The finished booklets are then delivered onto an optional shingle delivery conveyor MS45 DC, or directly into the booklet stacker BSS-10

Note: If only spine-squaring is required then refer to the <u>ARSD-S-100</u> option. The spine-squaring function of the ARSD-100 is faster (like the ARSD-S-100) and can handle a thicker booklet, compared with the lower-cost spine squarer option <u>SM-101</u>.

Technical Specification

Maximum speed:	3,200 copies/hour
Minimum booklet thickness	2 mm
Maximum booklet thickness	7 mm
Minimum size	210 mm spine length - 150 mm width
Maximum size	420 mm spine length - 330 mm width
High pressure air supply required	7 Bar`
Electrical Power required:	2 KW

IBIS Customized Finishing Solutions